



Power	50 KVA upto 1000 KVA
Primary Voltage Range	400/231V - 380/220V - 220/127V - 200/115V
Secondary Voltage Range	200/115V - 220/127V - 380/220V - 400/231V



Product View

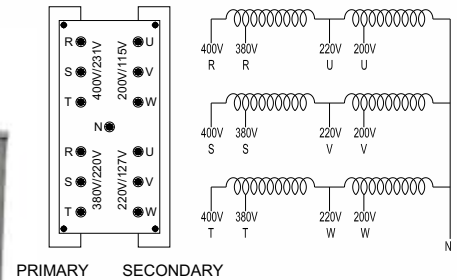

Auto Transformer Wiring Diagram

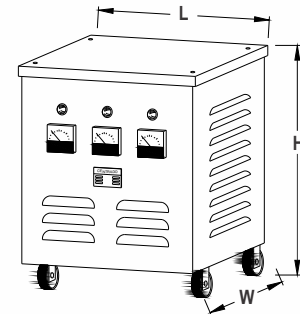

Dimension Drawing

### Dimensions and Weights

Capacity (KVA)	Phasa	I <sub>0</sub> (%)	Dimension			Weight (kg)
			L	W	H	
1	3	3	300	225	410	18.6
2	3	3	310	215	365	22.4
3	3	2.5	355	300	460	30.8
5	3	2.5	455	300	540	45.8
7.5	3	2.5	455	355	610	60.4
10	3	2.5	455	355	610	62.0
15	3	2.4	455	355	610	79.8
20	3	2.2	500	355	610	77.6
25	3	2.2	500	405	655	104.4
30	3	2.3	500	405	655	121.2
35	3	2.4	500	405	655	130.6
40	3	2.2	550	455	755	135.4
50	3	2.3	550	455	755	148.2

Capacity (KVA)	Phasa	I <sub>0</sub> (%)	Dimension			Weight (kg)
			L	W	H	
60	3	2.2	600	450	705	151.6
75	3	2.3	600	450	705	173.4
100	3	1.8	600	450	705	179.4
125	3	2.1	730	510	890	360
150	3	1.9	800	500	850	385
200	3	1.9	850	550	850	420
250	3	1.9	900	600	950	480
315	3	2.1	950	600	1000	600
400	3	1.9	950	600	1000	650
500	3	1.8	1050	650	1100	850
630	3	1.8	1100	700	1150	1100
800	3	2.1	1200	800	1200	1350
1000	3	1.8	1250	800	1250	1650

Note : PT. Centrado Prima International reserves the right to change information at any time and without notice previously. Product design, dimensions or weight may vary. \*